

# SG1100UD-MV

MV Grid-connected PV Inverter for 1500Vdc System



## HIGH YIELD

- Advanced three-level technology, max. inverter efficiency 99%
- Effective cooling, full power operation at 45 °C



## SMART O&M

- Integrated zone monitoring and MV parameters monitoring function for online analysis and trouble shooting
- Modular design, easy for maintenance



## SAVED INVESTMENT


- Low transportation and installation cost due to 20-foot container design
- DC 1500V system, low system cost
- Integrated MV transformer, switchgear, and LV auxiliary power supply
- Q at night function optional



## GRID SUPPORT

- Compliance with standards: IEC 61727, IEC 62116, IEC 62271-202, IEC 62271-200, IEC 60076
- Low/High voltage ride through (L/HVRT)
- Active & reactive power control and power ramp rate control

## EFFICIENCY CURVE

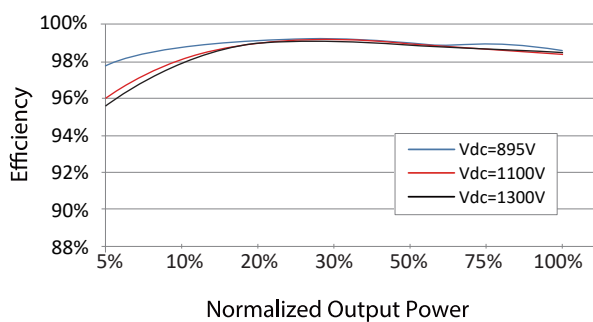

| Type Designation                                        | SG1100UD-MV                                                                                                                                                   |
|---------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Input (DC)</b>                                       |                                                                                                                                                               |
| Max. PV input voltage                                   | 1500 V                                                                                                                                                        |
| Min. PV input voltage / Startup input voltage           | 895 V / 905 V                                                                                                                                                 |
| MPP voltage range                                       | 895 V – 1500 V                                                                                                                                                |
| No. of independent MPP inputs                           | 1                                                                                                                                                             |
| No. of DC inputs                                        | 5 ( optional: 7 )                                                                                                                                             |
| Max. PV input current                                   | 1435 A                                                                                                                                                        |
| Max. DC short-circuit current                           | 3528 A                                                                                                                                                        |
| PV array configuration                                  | Negative grounding or floating                                                                                                                                |
| <b>Output (AC)</b>                                      |                                                                                                                                                               |
| AC output power                                         | 1100 kVA @ 45 °C, 1133 kVA @ 40 °C, 1265 kVA @ 22.5 °C                                                                                                        |
| Max. inverter output current                            | 1160 A                                                                                                                                                        |
| Max. AC output current                                  | 73 A                                                                                                                                                          |
| Rated voltage range                                     | 10 kV – 35 kV                                                                                                                                                 |
| Nominal grid frequency / Grid frequency range           | 50 Hz / 45 Hz – 55 Hz, 60 Hz / 55 Hz – 65 Hz                                                                                                                  |
| Harmonic (THD)                                          | < 1.5 % ( at nominal power )                                                                                                                                  |
| Power factor at nominal power / Adjustable power factor | > 0.99 / 0.8 leading – 0.8 lagging                                                                                                                            |
| Feed-in phases / AC connection                          | 3 / 3                                                                                                                                                         |
| <b>Efficiency</b>                                       |                                                                                                                                                               |
| Inverter max. efficiency / Inverter European efficiency | 99.0 % / 98.8 %                                                                                                                                               |
| <b>Transformer</b>                                      |                                                                                                                                                               |
| Transformer rated power                                 | 1100 kVA                                                                                                                                                      |
| Transformer max. power                                  | 1265 kVA                                                                                                                                                      |
| LV / MV voltage                                         | 0.63 kV / ( 10 – 35 ) kV                                                                                                                                      |
| Impedance                                               | 6.5 % ( 0 - ± 10 % ) @ 1100 kVA                                                                                                                               |
| Transformer vector                                      | Dy11                                                                                                                                                          |
| Transformer cooling method                              | ONAN                                                                                                                                                          |
| Oil type                                                | Mineral oil ( PCB free )                                                                                                                                      |
| <b>Protection &amp; Function</b>                        |                                                                                                                                                               |
| DC input protection                                     | DC load switch + fuse                                                                                                                                         |
| Inverter output protection                              | AC circuit breaker                                                                                                                                            |
| AC MV output protection                                 | AC circuit breaker                                                                                                                                            |
| Surge protection                                        | DC Type II / AC Type II                                                                                                                                       |
| Grid monitoring / Ground fault monitoring               | Yes / Yes                                                                                                                                                     |
| Insulation monitoring                                   | Yes                                                                                                                                                           |
| Overheat protection                                     | Yes                                                                                                                                                           |
| Q at night function                                     | Optional                                                                                                                                                      |
| <b>General data</b>                                     |                                                                                                                                                               |
| Dimensions (W*H*D)                                      | 6058 mm * 2896 mm * 2438 mm                                                                                                                                   |
| Weight                                                  | ≤ 8.5 T                                                                                                                                                       |
| Degree of protection                                    | Inverter: IP65 / Others: IP54                                                                                                                                 |
| Auxiliary power supply                                  | 15 kVA (optional: max. 30 kVA)                                                                                                                                |
| Operating ambient temperature range *                   | -20 °C to 60 °C ( optional: -30 °C to 60 °C, > 45 °C derating )                                                                                               |
| Allowable relative humidity range                       | 0 % – 100 %                                                                                                                                                   |
| Cooling method                                          | Temperature controlled forced air cooling                                                                                                                     |
| Max. operating altitude                                 | 1000 m ( standard ) / > 1000 m ( optional )                                                                                                                   |
| Display                                                 | LED Indicators, Ethernet + WebHMI                                                                                                                             |
| Communication                                           | Standard: RS485, Ethernet                                                                                                                                     |
| Compliance                                              | CE, IEC 62109, IEC 61727, IEC 62116, IEC 60068, IEC 61683, VDE-AR-N 4110:2018, VDE-AR-N 4120:2018, EN 50549-2, UNE 206007-1:2013, NTS 631, UTE C15-712-1:2013 |

\* The ambient temperature is determined as the average temperature obtained from at least four temperature monitoring points located at a distance of 1 meter from the equipment, at a height halfway up the machine. The temperature sensors must be shielded from airflow, thermal radiation, and rapid temperature fluctuations to prevent display inaccuracies. If the ambient temperature is below -30°C, pls contact Sungrow.