



SG-48TG4D

455-480W

Maximum Efficiency **24.0%**

Smart Functions

Self-Cleaning Technology

AR + AS Dual-layer Anti-soiling Coating

- Longer self-cleaning lifespan
- Continuous high power generation
- Less frequency of O&M

Product Warranty

25 Year


Warranty for Materials and Processing

30 Year

Warranty for Extra Linear Power Output

First Year Power Degradation **<1%**

Year 2-30 Power Degradation **<0.4%**

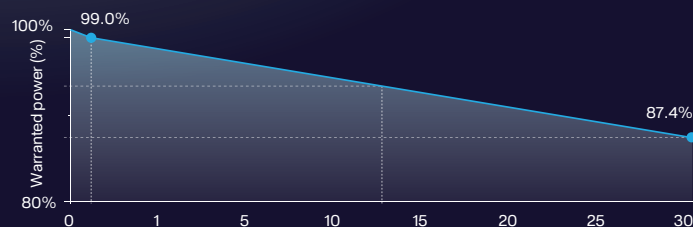


Quality Certification




- IEC61215:2021 / IEC61730:2023
- IEC61701 / IEC62716 / IEC60068 / IEC62804
- ISO9001:2015: Quality Management System
- ISO14001:2015: Environment Management System
- ISO45001:2018: Occupational health and safety management systems

Engineering Drawings

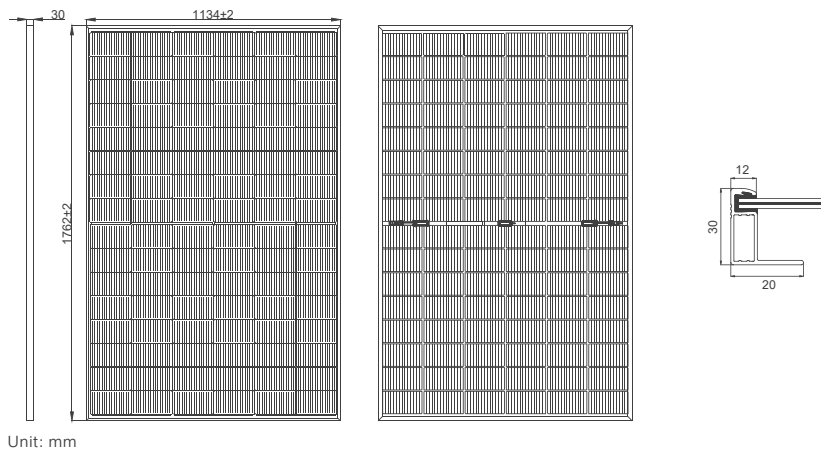

Unit: mm

I-V and P-V Curves

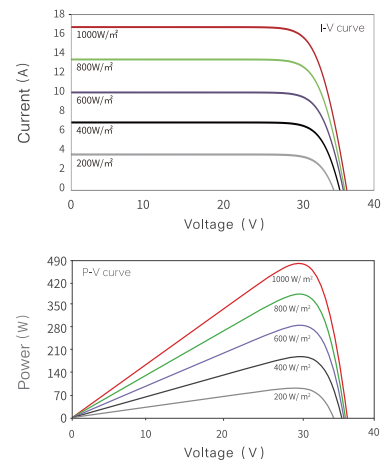

Specifications (STC)

Maximum Power Pmax (W)	455	460	465	470	475	480
Voltage at Maximum Power (Vmp/V)	30.40	30.67	30.94	31.21	31.48	31.75
Current at Maximum Power (Imp/A)	14.97	15.00	15.03	15.06	15.09	15.12
Open Circuit Voltage (Voc/V)	35.98	36.15	36.32	36.49	36.66	36.83
Short Circuit Current (Isc/A)	15.87	15.90	15.93	15.96	15.99	16.02
Module Efficiency (%)	22.8	23.0	23.3	23.5	23.8	24.0
Power Tolerance	0~+3%	Maximum System Voltage			DC1500V	
Maximum Series Fuse Rating	30A	Operating Temperature			-40°C~+70°C	
Bifacial Factor						80±5%

STC: Irradiance 1000W/m², Cell Temperature 25°C, AM=1.5

Specifications (BNPI)

Maximum Power Pmax (W)	501	506	512	517	523	528
Voltage at Maximum Power (Vmp/V)	30.40	30.67	30.94	31.21	31.48	31.75
Current at Maximum Power (Imp/A)	16.47	16.50	16.53	16.57	16.60	16.63
Open Circuit Voltage (Voc/V)	35.98	36.15	36.32	36.49	36.66	36.83
Short Circuit Current (Isc/A)	17.46	17.49	17.52	17.56	17.59	17.62

BNPI: Irradiance Front 1000W/m², Rear 135W/m², Cell Temperature 25°C, AM=1.5

Mechanical Characteristics

Cell Type	N-type mono-crystalline
Cell Orientation	96 (2×48)
Dimension	1762×1134×30mm
Weight	24.0kg
Front Glass	2.0mm, Anti-reflection Coating
Back Glass	2.0mm, Heat Strengthened Glass
Frame	Composite material
Junction Box	IP68 rated
Output Cables	4mm ² , (+) : 1200mm, (-) : 1200mm or customize length
Connector Type	MC4-EVO2A/others
Mechanical Load	5400Pa (Front side) /2400Pa (Rear side)

Temperature Characteristics

Temperature Coefficients of Pmax	-0.29%/°C
Temperature Coefficients of Voc	-0.25%/°C
Temperature Coefficients of Isc	0.045%/°C

Packaging Configuration

Packing Detail	36 pcs/pallets, 72 pcs/stack, 936 pcs/ 40'HQ container
----------------	--

SUNGROW Sungrow Renewables

NO.2, Tianhu Road, High-tech Industry, Development Zone, Hefei, P.R. China

modulesales@sungrowpower.com www.sungrowplant.com

*Specifications included in this datasheet are subject to change without notice. Sungrow Renewables reserves the right of final interpretation.