

MVS4500-LV

MV Turnkey Solution for 1500 Vdc String Inverter SG320HX / SG320HX-20



SAVED INVESTMENT

- Up to 5.28 MW block design
- Easy transportation due to standard container design
- All pre-assembled for easy set-up and commissioning



EASY O&M

- Online analysis for fast trouble shooting
- Modular design, main device easy replacement



SAFETY

- MV and LV isolated, independent control room
- All key components front accessible, no need walk-in operation



RELIABLE


- All components type-tested
- Compliance with standards: IEC 60076, IEC 62271, IEC 61439



Type designation		MVS4500-LV
Transformer		
Transformer type	Oil immersed	
Rated power	4500 kVA @ 51 °C , 4527 kVA @ 50 °C	
Max. power	5280 kVA @ 30 °C	
Vector group	Dy11	
LV / MV voltage	0.8 kV / (10 - 35) kV	
Maximum input current at nominal voltage	3811 A	
Frequency	50 Hz / 60 Hz	
Tapping on HV	0 , ± 2 * 2.5 %	
Efficiency	≥ 99 % (optional:Tier2)	
Cooling method	ONAN (Oil Natural Air Natural)	
Impedance	8 % (± 10 %)	
Oil type	Mineral oil (PCB free)	
Winding material	Al / Al	
Insulation class	A	
MV switchgear		
Insulation type	SF6	
Rated voltage range	24 kV – 40.5 kV	
Rated current	630 A	
Internal arcing fault	IAC AFL 20 kA / 1 s	
LV panel		
Main switch specification	4000 A / 800 Vac / 3P, 1 pcs	
Disconnecter specification	260A / 800 Vac / 3P, 15 pcs	
Fuse specification	400A / 800 Vac / 1P, 45 pcs	
Protection		
AC input protection	Fuse+Disconnecter	
Transformer protection	Oil-temperature, Oil-level, Oil-pressure, Buchholz	
Relay protection	50 / 51 , 50 N / 51 N	
Surge protection	AC Type I + II	
General data		
Dimensions (W * H * D)	6058 mm * 2896 mm * 2438 mm	
Approximate weight	17 T	
Operating ambient temperature range *	-20 °C to 60 °C (optional: -30 °C to 60 °C)	
Auxiliary power supply	15 kVA / 400 V (optional: max. 40 kVA)	
Degree of protection	IP54	
Allowable relative humidity range (non-condensing)	0 % – 95 %	
Operating altitude	1000 m (standard) / > 1000 m (optional)	
Communication	Standard: RS485, Ethernet, Optical fiber	
Compliance	IEC 60076, IEC 62271-200, IEC 62271-202, IEC 61439-1, EN 50588-1	


* The ambient temperature is determined as the average temperature obtained from at least four evenly distributed temperature monitoring points located at a distance of 1 meter from the equipment, at a height halfway up the machine. The temperature sensors must be shielded from airflow, thermal radiation, and rapid temperature fluctuations to prevent display inaccuracies.

CIRCUIT DIAGRAM

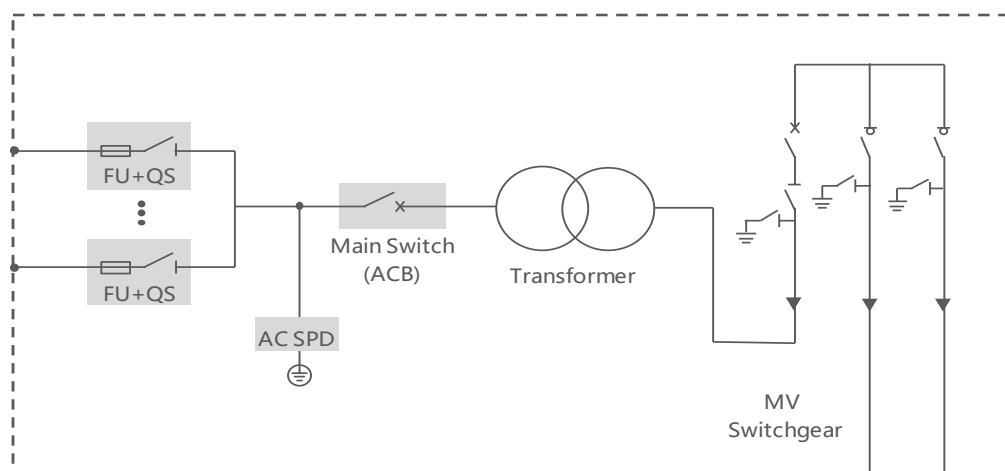

MVS4500-LV

MV Turnkey Solution for 1500 Vdc String Inverter SG320HX-20

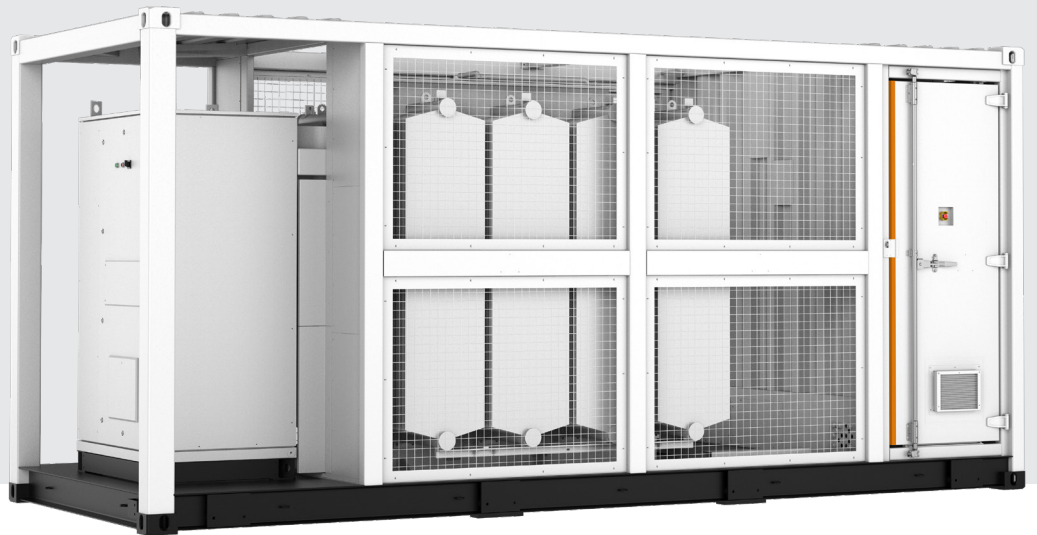

SAVED INVESTMENT

- Up to 5.25 MW block design
- Easy transportation due to standard container design
- All pre-assembled for easy set-up and commissioning



EASY O&M

- Online analysis for fast trouble shooting
- Modular design, main device easy replacement



SAFETY

- MV and LV isolated, independent control room
- All key components front accessible, no need walk-in operation



RELIABLE

- All components type-tested
- Compliance with standards: IEC 60076, IEC 62271, IEC 61439

CIRCUIT DIAGRAM

